

NAMA

QINGDAO NAMA INDUSTRIAL CO.,LTD.


Room 2601,Shuangfu Building,NO.887,Tong'an Road,
Qingdao,266000,China
Tel: +86 532 85027077
Fax: +86 532 85027677
E-mail: nama@nama.cn

www.nama.cn



[Wechat]

2016
NAMA
TRUCK & BUS
TIRES

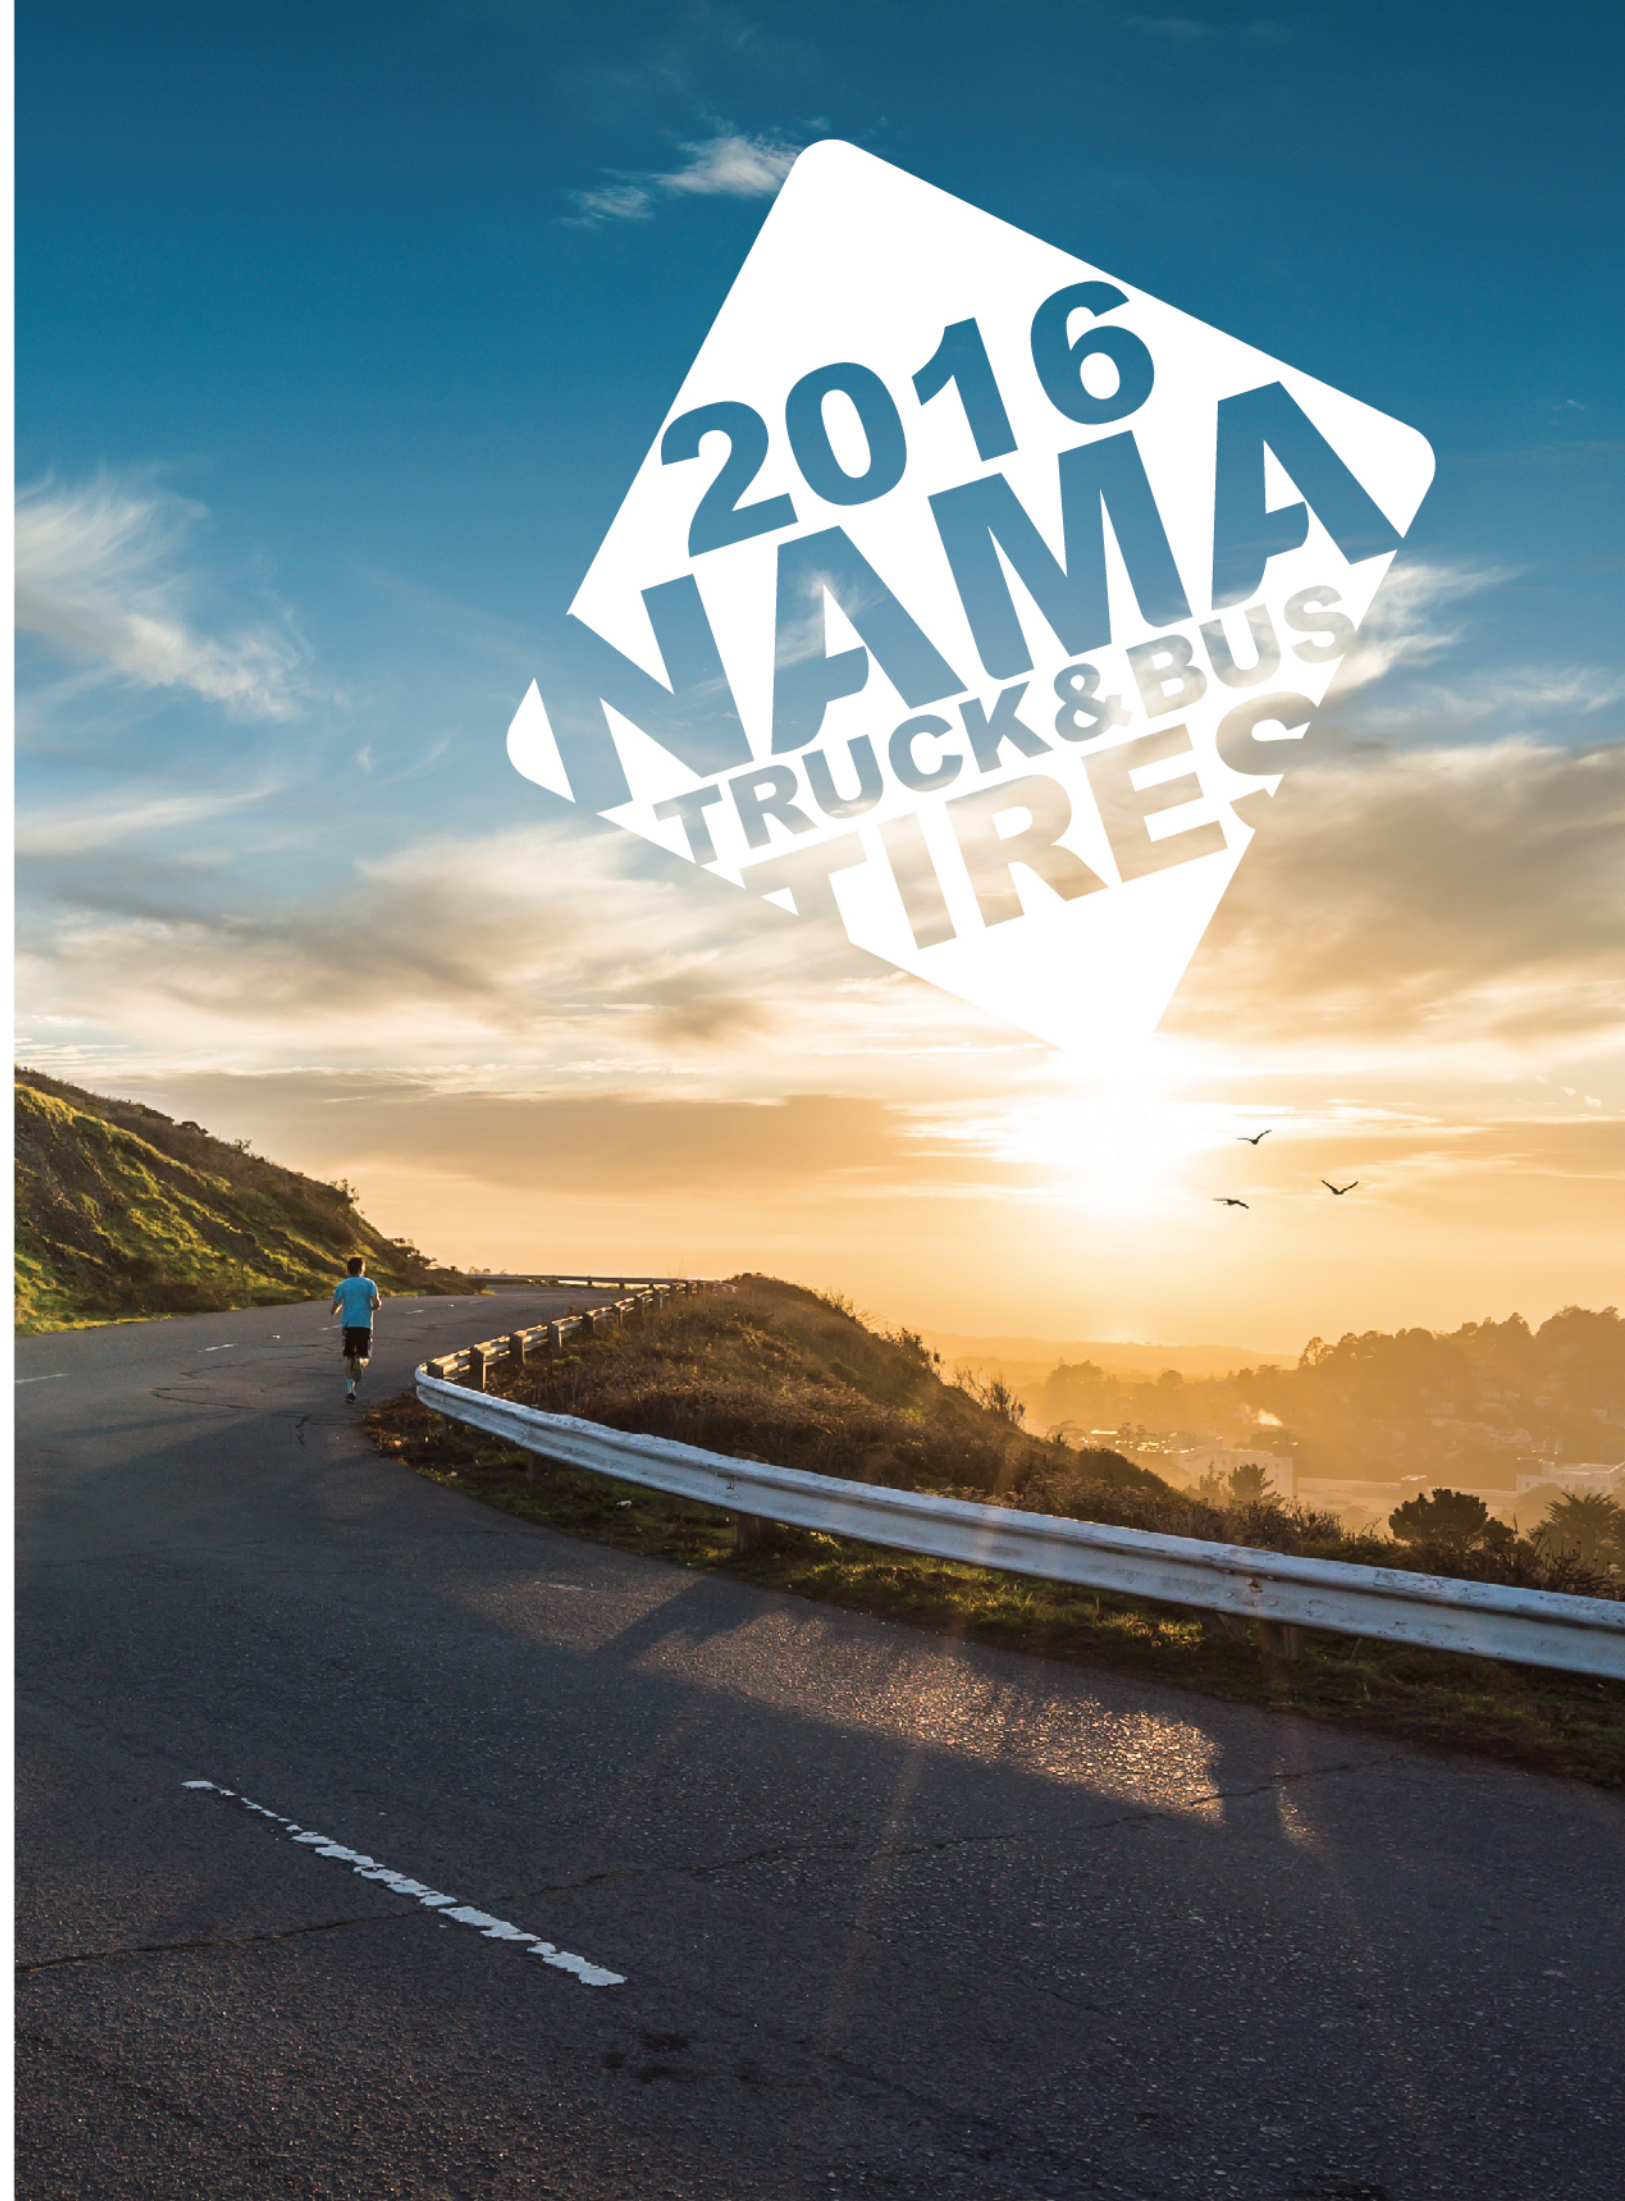



ABOUT US

QINGDAO NAMA INDUSTRIAL CO.,LTD.

NAMA GROUP was founded in 2000.

With the philosophy “QUALITY IS LIFE”, NAMA GROUP adopted the world leading tire technology, used the most premium Malaysian natural rubber, renowned Belgium BEKAERT brand steel wire and etc. Each NAMA tire had passed strict quality control tests. NAMA tire ranks very high quality level among Chinese brands.

After 15 years’ hard working, NAMA GROUP has produced 7,000,000 units truck tyre tire, 1,500,000 units Bias Tires and 12,000,000 units Car Tires in total. NAMA Tires have been exporting to more than 100 countries all over the world. Thanks to the loyalty of its distributors, NAMA has become one of the most reliable brands in the world.

In order to serve its distributors well, NAMA GROUP developed new bus/ truck tire and car tire lines for Northern American, European and Russian Market. SMARTWAY and EU-LABEL are available now.

Insisting the philosophy “QUALITY IS LIFE” and slogan “Carrying the world, Driving the future”, NAMA GROUP will focus on the globalization and continue to supply high quality tires for clients all over the world with most convenient conditions

WHY WORK WITH NAMA

1. QUALITY IS LIFE: eternal belief of NAMA GROUP.
2. 2014 annual production capacity: TBR tire 1,200,000 units, PCR tire 12,000,000 units, OTR tire 40,000 units.
3. Exported to more than 100 countries, NAMA brand has earned high reputation worldwide
4. Most professional tire services, products can be custom-made according to clients' request.
5. Comprehensive marketing support policy for clients.

NAMA GROUP

CONTENTS

TUBE TYPE 1 - 12

6.50R16	1	10.00R20	6
7.00R16	1	11.00R20	7
7.50R16	2	12.00R20	9
8.25R16	3	325/95R24	10
8.25R20	4	12.00R24	11
9.00R20	5	14.00R20	12

TUBELESS 13 - 39

205/75R17.5	13	12R22.5	27
215/75R17.5	14	13R22.5	28
225/75R17.5	15	255/70R22.5	29
235/75R17.5	16	275/70R22.5	29
245/70R17.5	17	295/60R22.5	30
9.5R17.5	17	295/75R22.5	31
225/70R19.5	18	295/80R22.5	32
245/70R19.5	19	305/70R22.5	33
265/70R19.5	20	315/60R22.5	33
285/70R19.5	21	315/70R22.5	34
305/70R19.5	22	315/80R22.5	35
435/50R19.5	22	385/55R22.5	36
445/45R19.5	23	385/65R22.5	36
8R22.5	23	425/65R22.5	37
9R22.5	24	445/65R22.5	37
10R22.5	24	285/75R24.5	38
11R22.5	25	11R24.5	39

APPENDIX 41-47

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
6.50R16	12	5.50F	110/105 K	750	185	1067/925	770	TT



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
7.50R16	14	6.00G	122/118 K	805	215	1500/1320	770	TT



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
7.00R16	14	5.50F	118/114 K	775	205	1320/1180	770	TT



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
8.25R16	16	6.50H	128/124 K	855	235	1800/1600	770	TT



NA02



NA06



NA18



ND16



ND21



ND45



ND51

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
8.25R20	16	6.50	139/137 K	974	236	2430/2300	930	TT



NA02



NA18



ND16



ND21

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
9.00R20	16	7.0	144/142 K	1018	258	2800/2650	900	TT



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
10.00R20	16	7.5	146/143 K	1052	275	3000/2725	830	TT
	18	7.5	149/146 K	1052	275	3250/3000	930	TT



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
11.00R20	16	8.0	150/147 K	1082	296	3350/3075	830	TT
	18	8.0	152/149 K	1082	296	3550/3250	930	TT



NA02



NA18



NA10



NA11



ND19+



ND21



ND45



ND51



NA12



NF18



NF22



ND02



ND08



ND15



ND16



ND17

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
12.00R20	18	8.5	154/151 K	1122	313	3750/3450	830	TT



NA02



NA10



NA11



NA12



ND45



ND51



NA18



ND02



ND08



ND15

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
325/95R24	20	8.5	160/157 K	1226	313	4500/4125	900	TT

PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
20	8.5	160/157 K	1226	313	4500/4125	900	TT



ND16



ND17



ND19+



ND21



ND16

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
12.00R24	20	8.5	160/157 K	1226	313	4500/4125	900	TT



NA02



NA04



NA04+



NA04A



ND21+




ND22



NA05



NA10



NA16



NA18

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
14.00R20	20	10.0	164/161 F	1232	374	5000/4625	790	TT



NF11



ND10



ND16



ND19



ND24



ND42

TUBELESS TYPE

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
205/75R17.5	14	6.00	124/122 M	753	205	1600/1500	750	TL



NF06



NF19



ND03

TUBELESS TYPE

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
215/75R17.5	14	6.00	126/124 M	767	212	1700/1600	700	TL
	16	6.00	135/133 J	767	212	2180/2060	850	TL



NF06



NF17



NF19



NF35



ND03



ND21A



ND38

TUBELESS TYPE

TUBELESS TYPE

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
225/75R17.5	12	6.75	129/127 M	783	226	1850/1750	725	TL



NF06



ND03

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
235/75R17.5	14	6.75	132/130 M	797	233	2000/1900	775	TL
	16	6.75	143/141 J	797	233	2725/2575	875	TL



NF06



NF17



NF19



NF35



ND03



ND03+



ND21A



ND38

TUBELESS TYPE

TUBELESS TYPE

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
245/70R17.5	16	7.50	136/134 M	789	248	2240/2120	850	TL
	18	7.50	143/141 J	789	248	2725/2575	875	TL



NF06



ND03

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
9.5R17.5	16	6.75	129/127 L	974	229	1950/1850	750	TL
	18	6.75	143/141 J	974	229	2725/2575	850	TL



NF27



NF28

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
225/70R19.5	14	6.75	128/126 M	811	226	1800/1700	760	TL



NF06



NF17



NF19



NF35



ND03



ND03+



ND38

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
245/70R19.5	16	7.50	136/134 M	839	248	2240/2120	825	TL
	18	7.50	141/140 J	839	248	2575/2500	850	TL

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
265/70R19.5	16	7.50	140/138 M	867	262	2500/2360	775	TL
	18	7.50	143/141 J	867	262	2725/2575	850	TL



NF06



NF17



NF19



ND03



NF06



NF17



NF19



NF35



ND03+



ND03



ND03+



ND21A



ND38

TUBELESS TYPE

TUBELESS TYPE

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
285/70R19.5	18	8.25	146/144 M	895	283	3000/2800	900	TL
	18	8.25	150/148 J	895	283	3350/3150	900	TL



NF06



NF17



NF35



ND03



ND03+



ND38

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
305/70R19.5	18	9.00	148/145 M	923	305	3150/2900	850	TL



NF06



ND03

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
435/50R19.5	20	14.00	160 L	931	438	4500	900	TL



NF43

TUBELESS TYPE

TUBELESS TYPE

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
445/45R19.5	20	15.00	160 L	895	446	4500	900	TL



NF43

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
9R22.5	14	6.75	136/134 L	974	229	2240/2120	830	TL



NF17

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
8R22.5	14	6.00	130/128 L	935	203	1900/1800	830	TL



NF17

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
10R22.5	16	7.50	144/142 L	1019	254	2800/2650	900	TL



NF17

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
11R22.5	14	8.25	144/142 M/L	1054	279	2800/2650	720	TL
	16	8.25	146/143 M/J	1054	279	3000/2725	830	TL



NA02



NF03



NF03+/NF03+T



NF06



ND03



ND06



ND06+



ND11



NF08



NF17



NF19



NF31



ND20




ND21



ND38



ND46



NF32



NF35



NF36



NF45



ND47

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
12R22.5	18	9.00	152/149M	1084	300	3550/3275	930	TL



NA02



NF03




NF03+



NF06



NF17



NF31



ND03



ND15



ND21

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
13R22.5	18	9.75	154/151 L/K	1124	320	3750/3450	850	TL



NA02



NA18



NF03+



NF06



NF17



NF31



ND03



ND03+



ND08



ND11



ND21

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
255/70R22.5	16	7.50	140/137M	930	255	2500/2300	830	TL



NF06



NF19



NF35

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
275/70R22.5	16	8.25	148/145 M	958	276	3150/2900	900	TL



NF06



NF17



NF19



NF35



ND03



ND03+



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
295/60R22.5	16	9.00	149/146M	926	292	3250/3000	900	TL




NF03+



ND03+

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
295/75R22.5	14	9.00	144/141 L/M	1020	298	2800/2575	760	TL
	16	9.00	146/143 L/M	1020	298	3000/2725	830	TL

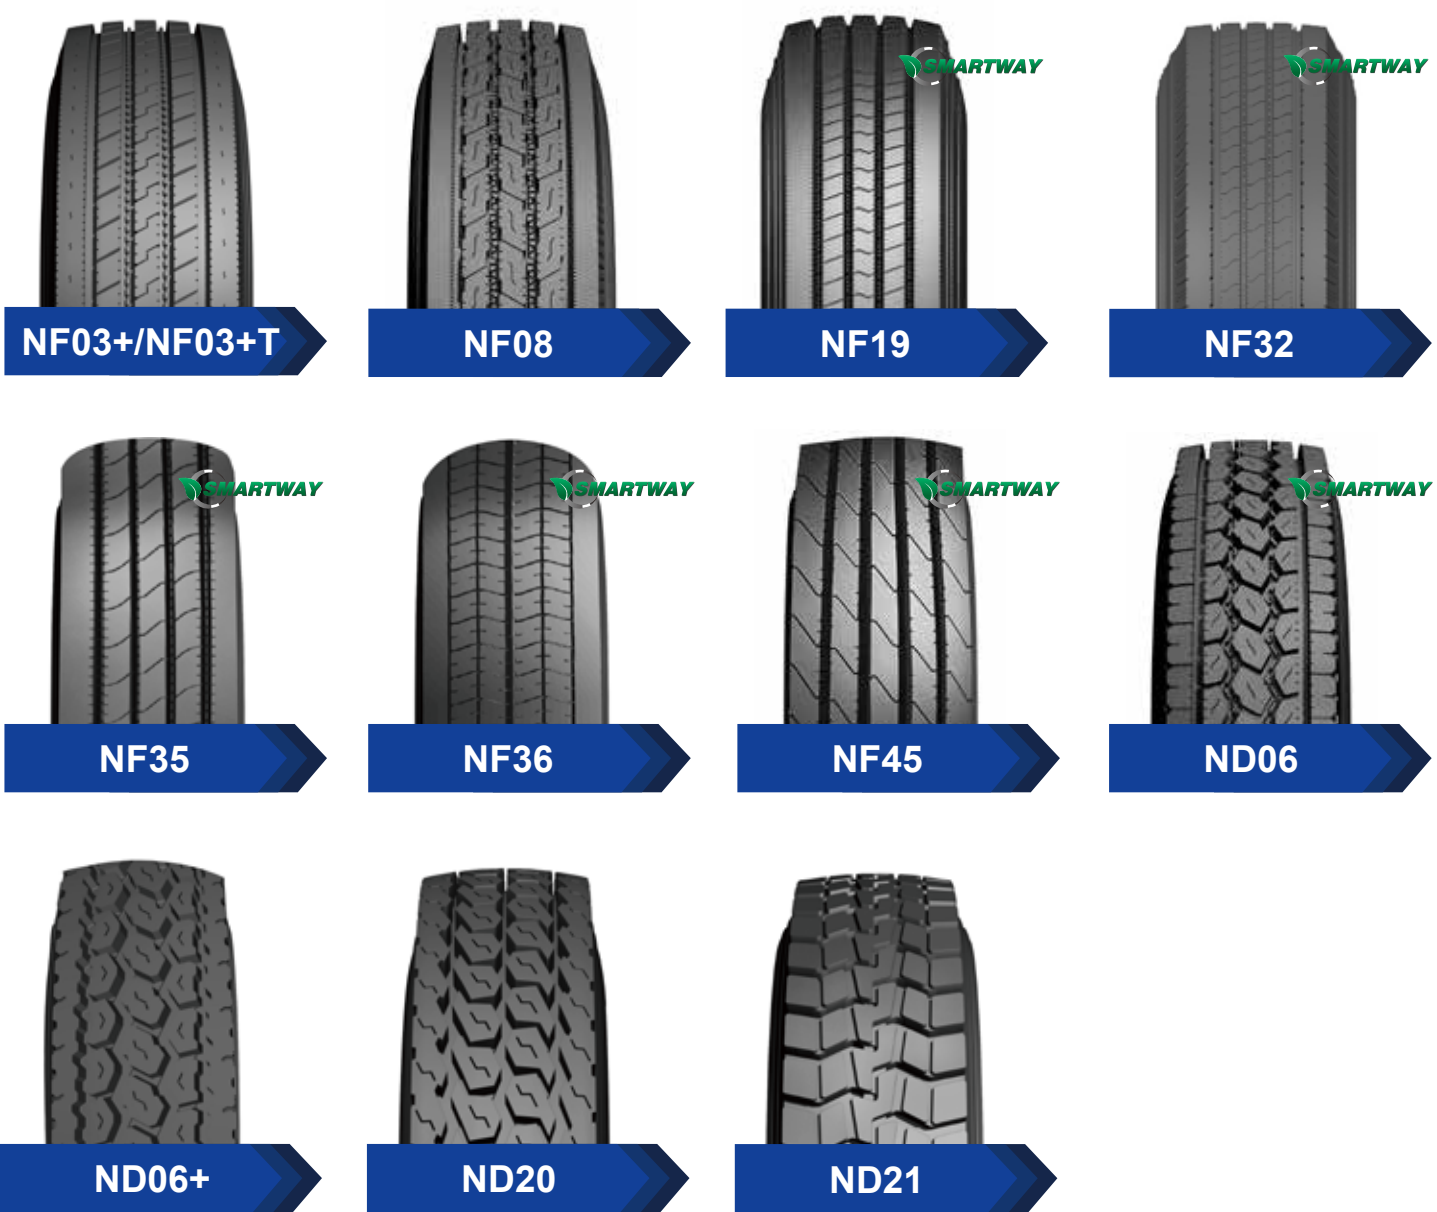

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
295/80R22.5	18	9.00	152/149M/K	1044	298	3550/3250	900	TL



NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
305/70R22.5	16	9.00	152/148L	1000	305	3550/3150	900	TL



NF17



ND03+

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
315/60R22.5	16	9.75	152/148M	950	313	3550/3150	900	TL



NF03



NF17



ND03+

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
315/70R22.5	18	9.00	154/150M	1013	312	3750/3350	900	TL
	20	9.00	157/153L	1013	312	4125/3650	870	TL



NF05



NF06



NF17



ND03



ND03+



ND11+

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
315/80R22.5	18	9.00	154/151M	1076	312	3750/3450	850	TL
	18	9.00	156/150M	1076	312	4000/3350	830	TL
	20	9.00	157/153L	1076	312	4125/3650	870	TL



NA02



NA18



NF03



NF03+



NF06



NF17



NF31



ND03



ND03+



ND11



ND21



ND28

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
385/55R22.5	20		160L (158K)					TL



NF43

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
385/65R22.5	20	11.75	160K	1072	389	4500	900	TL



NA01



NA07



NA09



NF27+



NF43

TUBELESS TYPE

NEW

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
425/65R22.5	20	13.00	165K	1124	430	5150	830	TL



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
445/65R22.5	20	14.00	169K	1150	444	5800	900	TL



TUBELESS TYPE

Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
285/75R24.5	14	9.00	144/141 L	1050	283	2800/2575	760	TL
	16	9.00	147/144 L	1050	283	3000/2725	830	TL



Size	PR	Standard Rim	Load Index &Speed Rating	Overall Dia (mm)	Section width (mm)	Max Load (kgs)	Pressure (kpa)	Tube
11R24.5	14	8.25	146/143 L/M	1104	279	3000/2725	720	TL
	16	8.25	149/146 L/M	1104	279	3250/3000	830	TL



NA02



NF03+



NF08



NF17



ND46



ND47



NF19



NF32T



NF35



NF36



NF45



ND06




ND20




ND21




Pattern	Size	PR	Load Index & Speed Rating
NA01	385/65R22.5	20	160K
NA02	6.50R16	12	110/105K
	7.00R16	14	118/114K
	7.50R16	14	122/118K
	8.25R16	16	128/124K
	8.25R20	16	139/137K
	9.00R20	16	144/142K
	10.00R20	16	146/143K
		18	149/146K
	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K
	12.00R24	20	160/157K
	11R22.5	16	146/143 M/J
	12R22.5	18	152/149M
	13R22.5	18	154/151L
	315/80R22.5	18	154/151M
		20	157/153L
	11R24.5	16	149/146 L/M
NA04	12.00R24	20	160/157K
NA04A	12.00R24	20	160/157K
NA04+	12.00R24	20	160/157K
NA05	12.00R24	20	160/157K
NA06	7.50R16	14	122/118L
	8.25R16	16	128/124L
NA07	385/65R22.5	20	160K
NA09	385/65R22.5	20	160K
NA10	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K
NA11	12.00R24	20	160/157K
		20	160/157K
	11.00R20	16	150/147K
NA12	12.00R20	18	152/149K
		18	154/151K
	9.00R20	16	144/142K
		16	144/142K
	10.00R20	16	146/143K
		18	149/146K
NA16	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K
		18	154/151K
	12.00R24	20	160/157K
		20	160/157K
	6.50R16	12	110/105K
		14	118/114K
	7.00R16	14	122/118K
		14	122/118K
NA18	8.25R16	16	128/124K
		16	139/137K
	8.25R20	16	144/142K
		16	144/142K
	10.00R20	16	146/143K
		18	149/146K
	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K
		18	154/151K
ND02	12.00R24	20	160/157K
		20	160/157K
	11.00R20	16	150/147K
ND02	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K



Pattern	Size	PR	Load Index & Speed Rating
ND03	205/75R17.5	14	124/122 M
	215/75R17.5	14	126/124 M
		16	135/133 J
	225/75R17.5	14	129/127 M
	235/75R17.5	14	132/130 M
		16	143/141 J
	245/70R17.5	16	136/134 M
		18	143/141 J
	225/70R19.5	14	128/126 M
		16	136/134 M
	245/70R19.5	18	141/140 J
		16	140/138 M
	265/70R19.5	18	143/141 J
		18	146/144 M
	285/70R19.5	18	150/148 J
		18	148/145M
	305/70R19.5	18	144/142 M/L
		16	146/143 M/J
	11R22.5	18	152/149M
		18	154/151 L/K
	12R22.5	16	148/145 M
		14	144/141 L/M
	295/75R22.5	16	146/143 L/M
		18	152/149M/K
	295/80R22.5	160	152/148M
		18	154/150M
	315/60R22.5	18	157/153L
		20	154/151M
	315/70R22.5	18	157/153L
		20	154/151M
	315/80R22.5	14	128/126 M
		16	136/134 M
ND03+	245/70R19.5	18	141/140 J
		16	140/138 M
	265/70R19.5	18	143/141 J
		18	146/144 M
	285/70R19.5	18	150/148 J
		18	154/151 L/K
	13R22.5	16	148/145 M
		16	149/146M
	275/70R22.5	160	152/148M
		18	154/150M
	295/60R22.5	20	157/153L
		18	154/151M
ND06	315/70R22.5	14	144/142 M/L
		16	146/143 M/J
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
	11R24.5	14	146/143 L/M
		16	149/146 L/M
	285/75R24.5	14	144/141 L
		16	147/144 L
ND06+	11R22.5	14	144/142 M/L
		16	146/143 M/J
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M

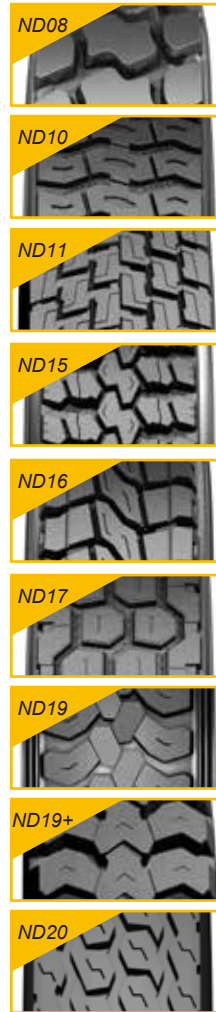




Pattern	Size	PR	Load Index & Speed Rating
ND08	10.00R20	16	146/143K
		18	149/146K
	11.00R20	16	150/147K
		18	152/149K
		18	154/151K
ND10	12.00R20	18	154/151 L/K
	12.00R24	20	160/157K
ND11	10.00R20	16	146/143K
		18	149/146K
	11R22.5	14	144/142 M/L
		16	146/143 M/J
	12R22.5	18	152/149M
	13R22.5	18	154/151 L/K
	295/80R22.5	18	152/149M/K
	315/70R22.5	18	154/150M
		20	157/153L
	315/80R22.5	18	154/151M
		20	157/153L
ND15	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K
ND16	12R22.5	18	152/149M
	6.50R16	12	110/105K
	7.00R16	14	118/114K
	7.50R16	14	122/118K
	8.25R16	16	128/124K
	8.25R20	16	139/137K
	9.00R20	16	144/142K
	10.00R20	16	146/143K
		18	149/146K
	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K
	12.00R24	20	160/157K
	325/95R24	20	160/157K
ND17	10.00R20	16	146/143K
		18	149/146K
	11.00R20	16	150/147K
		18	152/149K
ND19	12.00R20	18	154/151K
	12.00R24	20	160/157K
	12.00R24	20	160/157K
ND19+	11.00R20	16	150/147K
	12.00R20	18	152/149K
ND20	11R22.5	14	144/142 M/L
		16	146/143 M/J
	12R22.5	18	152/149M
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
	11R24.5	14	146/143 L/M
		16	149/146 L/M
	285/75R24.5	14	144/141 L
		16	147/144 L
	285/75R24.5	14	144/141 L
		16	147/144 L

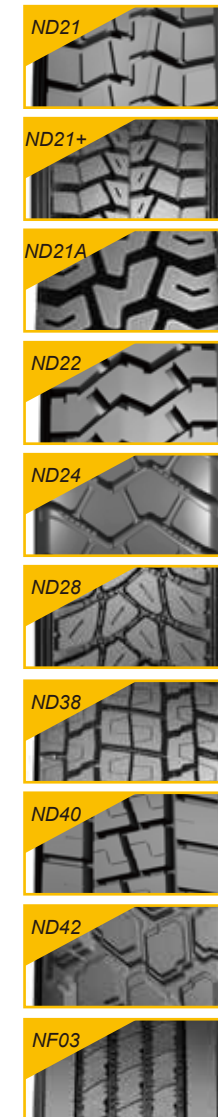


Pattern	Size	PR	Load Index & Speed Rating
ND21	7.50R16	14	122/118K
	8.25R16	16	128/124K
	8.25R20	16	139/137K
	11.00R20	16	150/147K
		18	152/149K
	12.00R20	18	154/151K
	11R22.5	14	144/142 M/L
		16	146/143 M/J
	13R22.5	18	154/151 L/K
	315/80R22.5	18	154/151M
		20	157/153L
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
	11R24.5	14	146/143 L/M
		16	149/146 L/M
	285/75R24.5	14	144/141 L
		16	147/144 L
	12.00R24	20	160/157K
ND21+	12.00R24	20	160/157K
ND21A	215/75R17.5	14	126/124 M
		16	135/133 J
	235/75R17.5	14	132/130 M
		16	143/141 J
ND22	265/70R19.5	16	140/138 M
		18	143/141 J
	12R22.5	18	152/149M
		20	160/157K
ND24	14.00R20	20	164/161F
ND28	315/80R22.5	20	154/151M
ND38	215/75R17.5	14	126/124 M
		16	135/133 J
	235/75R17.5	14	132/130 M
		16	143/141 J
	265/70R19.5	16	140/138 M
		18	143/141 J
	285/70R19.5	18	146/144 M
		14	144/142 M/L
	11R22.5	16	146/143 M/J
		18	149/146K
ND40	10.00R20	16	146/143K
ND42	14.00R20	20	164/161F
NF03	11R22.5	14	144/142 M/L
		16	146/143 M/J
	12R22.5	18	152/149M
	13R22.5	18	154/151 L/K
	295/60R22.5	16	149/146M
	295/80R22.5	18	152/149M/K
	315/80R22.5	18	154/151M
		20	157/153L



Pattern	Size	PR	Load Index & Speed Rating
NF03+ /NF03+T	11R22.5	14	144/142 M/L
		16	146/143 M/J
	12R22.5	18	152/149M
	275/70R22.5	16	149/146M
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
	295/80R22.5	18	152/149M/K
	315/60R22.5	160	152/148M
	315/80R22.5	18	154/151M
		20	157/153L
	11R24.5	14	146/143 L/M
		16	149/146 L/M
NF05	285/75R24.5	14	144/141 L
		16	147/144 L
	315/70R22.5	18	154/150M
		20	157/153L
NF06	315/80R22.5	18	154/151M
		20	157/153L
	205/75R17.5	14	124/122 M
	215/75R17.5	14	126/124 M
		16	135/133 J
	225/75R17.5	14	129/127 M
	235/75R17.5	14	132/130 M
		16	143/141 J
	245/70R17.5	16	136/134 M
		18	143/141 J
	225/70R19.5	14	128/126 M
	245/70R19.5	16	136/134 M
		18	141/140 J
	265/70R19.5	16	140/138 M
		18	143/141 J
	285/70R19.5	18	146/144 M
		18	150/148 J
	305/70R19.5	18	148/145M
	11R22.5	14	144/142 M/L
		16	146/143 M/J
	12R22.5	18	152/149M
	13R22.5	18	154/151 L/K
	255/70R22.5	16	140/137M
	275/70R22.5	16	148/145 M
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
	295/80R22.5	18	152/149M/K
	315/60R22.5	16	152/148M
	315/70R22.5	18	154/150M
		20	157/153L
	315/80R22.5	18	154/151M
		20	157/153L
NF07	295/80R22.5	18	152/149M/K
	315/80R22.5	18	154/151M
		20	157/153L



Pattern	Size	PR	Load Index & Speed Rating
NF08	255/70R22.5	16	140/137M
	11R22.5	14	144/142 M/L
		16	146/143 M/J
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
	11R24.5	14	146/143 L/M
		16	149/146 L/M
	285/75R24.5	14	144/141 L
NF17		16	147/144 L
	NF11	20	160/157K
	215/75R17.5	14	126/124 M
		16	135/133 J
	235/75R17.5	14	132/130 M
		16	143/141 J
	225/70R19.5	14	128/126 M
	245/70R19.5	16	136/134 M
		18	141/140 J
	265/70R19.5	16	140/138 M
		18	143/141 J
	285/70R19.5	18	146/144 M
		18	150/148 J
	305/70R19.5	18	148/145M
	11R22.5	14	144/142 M/L
		16	146/143 M/J
	12R22.5	18	152/149M
	13R22.5	18	154/151 L/K
	275/70R22.5	16	148/145 M
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
	295/80R22.5	18	152/149M/K
	315/60R22.5	16	152/148M
	315/70R22.5	18	154/150M
		20	157/153L
	8R22.5	14	130/128L
	9R22.5	14	136/134L
	10R22.5	16	144/142L
		16	150/147K
	NF22	18	152/149K
	NF27	16	131/129 L
		18	143/141 J
	NF27+	20	160K
		20	165K
		20	169K
NF28	9.5R17.5	16	131/129 L
		18	143/141 J
	11R22.5	14	144/142 M/L
		16	146/143 M/J
	12R22.5	18	152/149M
	13R22.5	18	154/151 L/K
	295/80R22.5	18	152/149M/K
	315/80R22.5	18	154/151M
NF31		20	157/153L

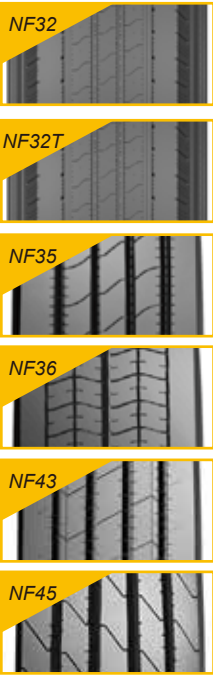

Pattern	Size	PR	Load Index & Speed Rating
NF32	11R22.5	14	144/142 M/L
		16	146/143 M/J
	295/75R22.5	14	144/141 L/M
		16	146/143 L/M
NF32T	11R24.5	14	146/143 L/M
	11R24.5	16	149/146 L/M
NF35	215/75R17.5	14	126/124 M
		16	135/133 J
	235/75R17.5	14	132/130 M
		16	143/141 J
	245/70R17.5	16	136/134 M
		18	143/141 J
	225/70R19.5	14	128/126 M
		16	136/134 M
	245/70R19.5	18	141/140 J
		16	140/138 M
	265/70R19.5	18	143/141 J
		18	146/144 M
	285/70R19.5	18	150/148 J
		14	144/142 M/L
	11R22.5	16	146/143 M/J
		18	152/149M
NF36	12R22.5	18	154/151 L/K
		16	140/137M
	275/70R22.5	16	148/145 M
		14	144/142 M/L
	11R22.5	16	146/143 M/J
		14	144/141 L/M
	295/75R22.5	16	146/143 L/M
		14	146/143 L/M
NF43	11R24.5	16	149/146 L/M
		14	144/141 L
	285/75R24.5	16	147/144 L
		20	160K
NF45	385/65R22.5	14	144/142 M/L
		16	146/143 M/J
	11R22.5	14	144/141 L/M
		16	146/143 L/M
	295/75R22.5	14	146/143 L/M
		16	149/146 L/M
	11R24.5	14	144/141 L
		16	147/144 L